


705 St. Paul Street Rochester, New York 14605 Telephone: (585) 248-4100 Fax: (585) 248-4111 E-mail: gratings@newport.com Web Site: https://www.gratinglab.com

DIFFRACTION GRATING SPECIFICATION SHEET

53-*-510R		3/24/2021	
300 g/mm plane ruled reflection grating with 8.6° nominal blaze angle			
1171			
Maximum Ruled Area:	groove length	204 mm	
	ruled width:	306 mm	
	300 g/mm plane ruled 1171	300 g/mm plane ruled reflection grating with 8.6° 1171Maximum Ruled Area:groove length	

Efficiency Curve	spectral order:	m = 1	polarization(s):	Unpolarized
	Coating:	aluminum		
Remarks:				

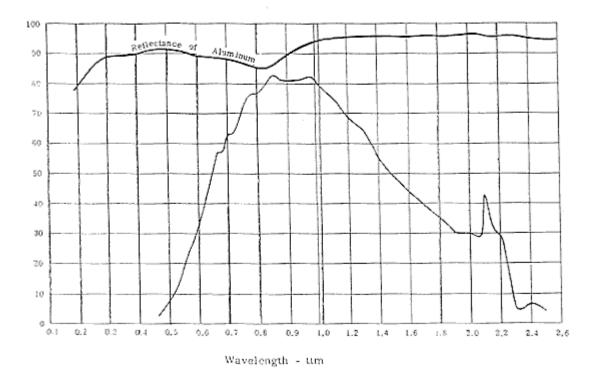

Note: The efficiency curve above is relative (not absolute) and was measured in an in-plane near Littrow configuration (unless otherwise indicated). Efficiency curves are only representative: actual efficiency may vary significantly depending on use geometry and measurement technique. This efficiency curve is for master 1171; two masters with the same catalog number may have different efficiency curves. The uncertainty band on the data in the above efficiency curve(s) is +/- three percentage points.

©2021 Newport Corporation All rights reserved.